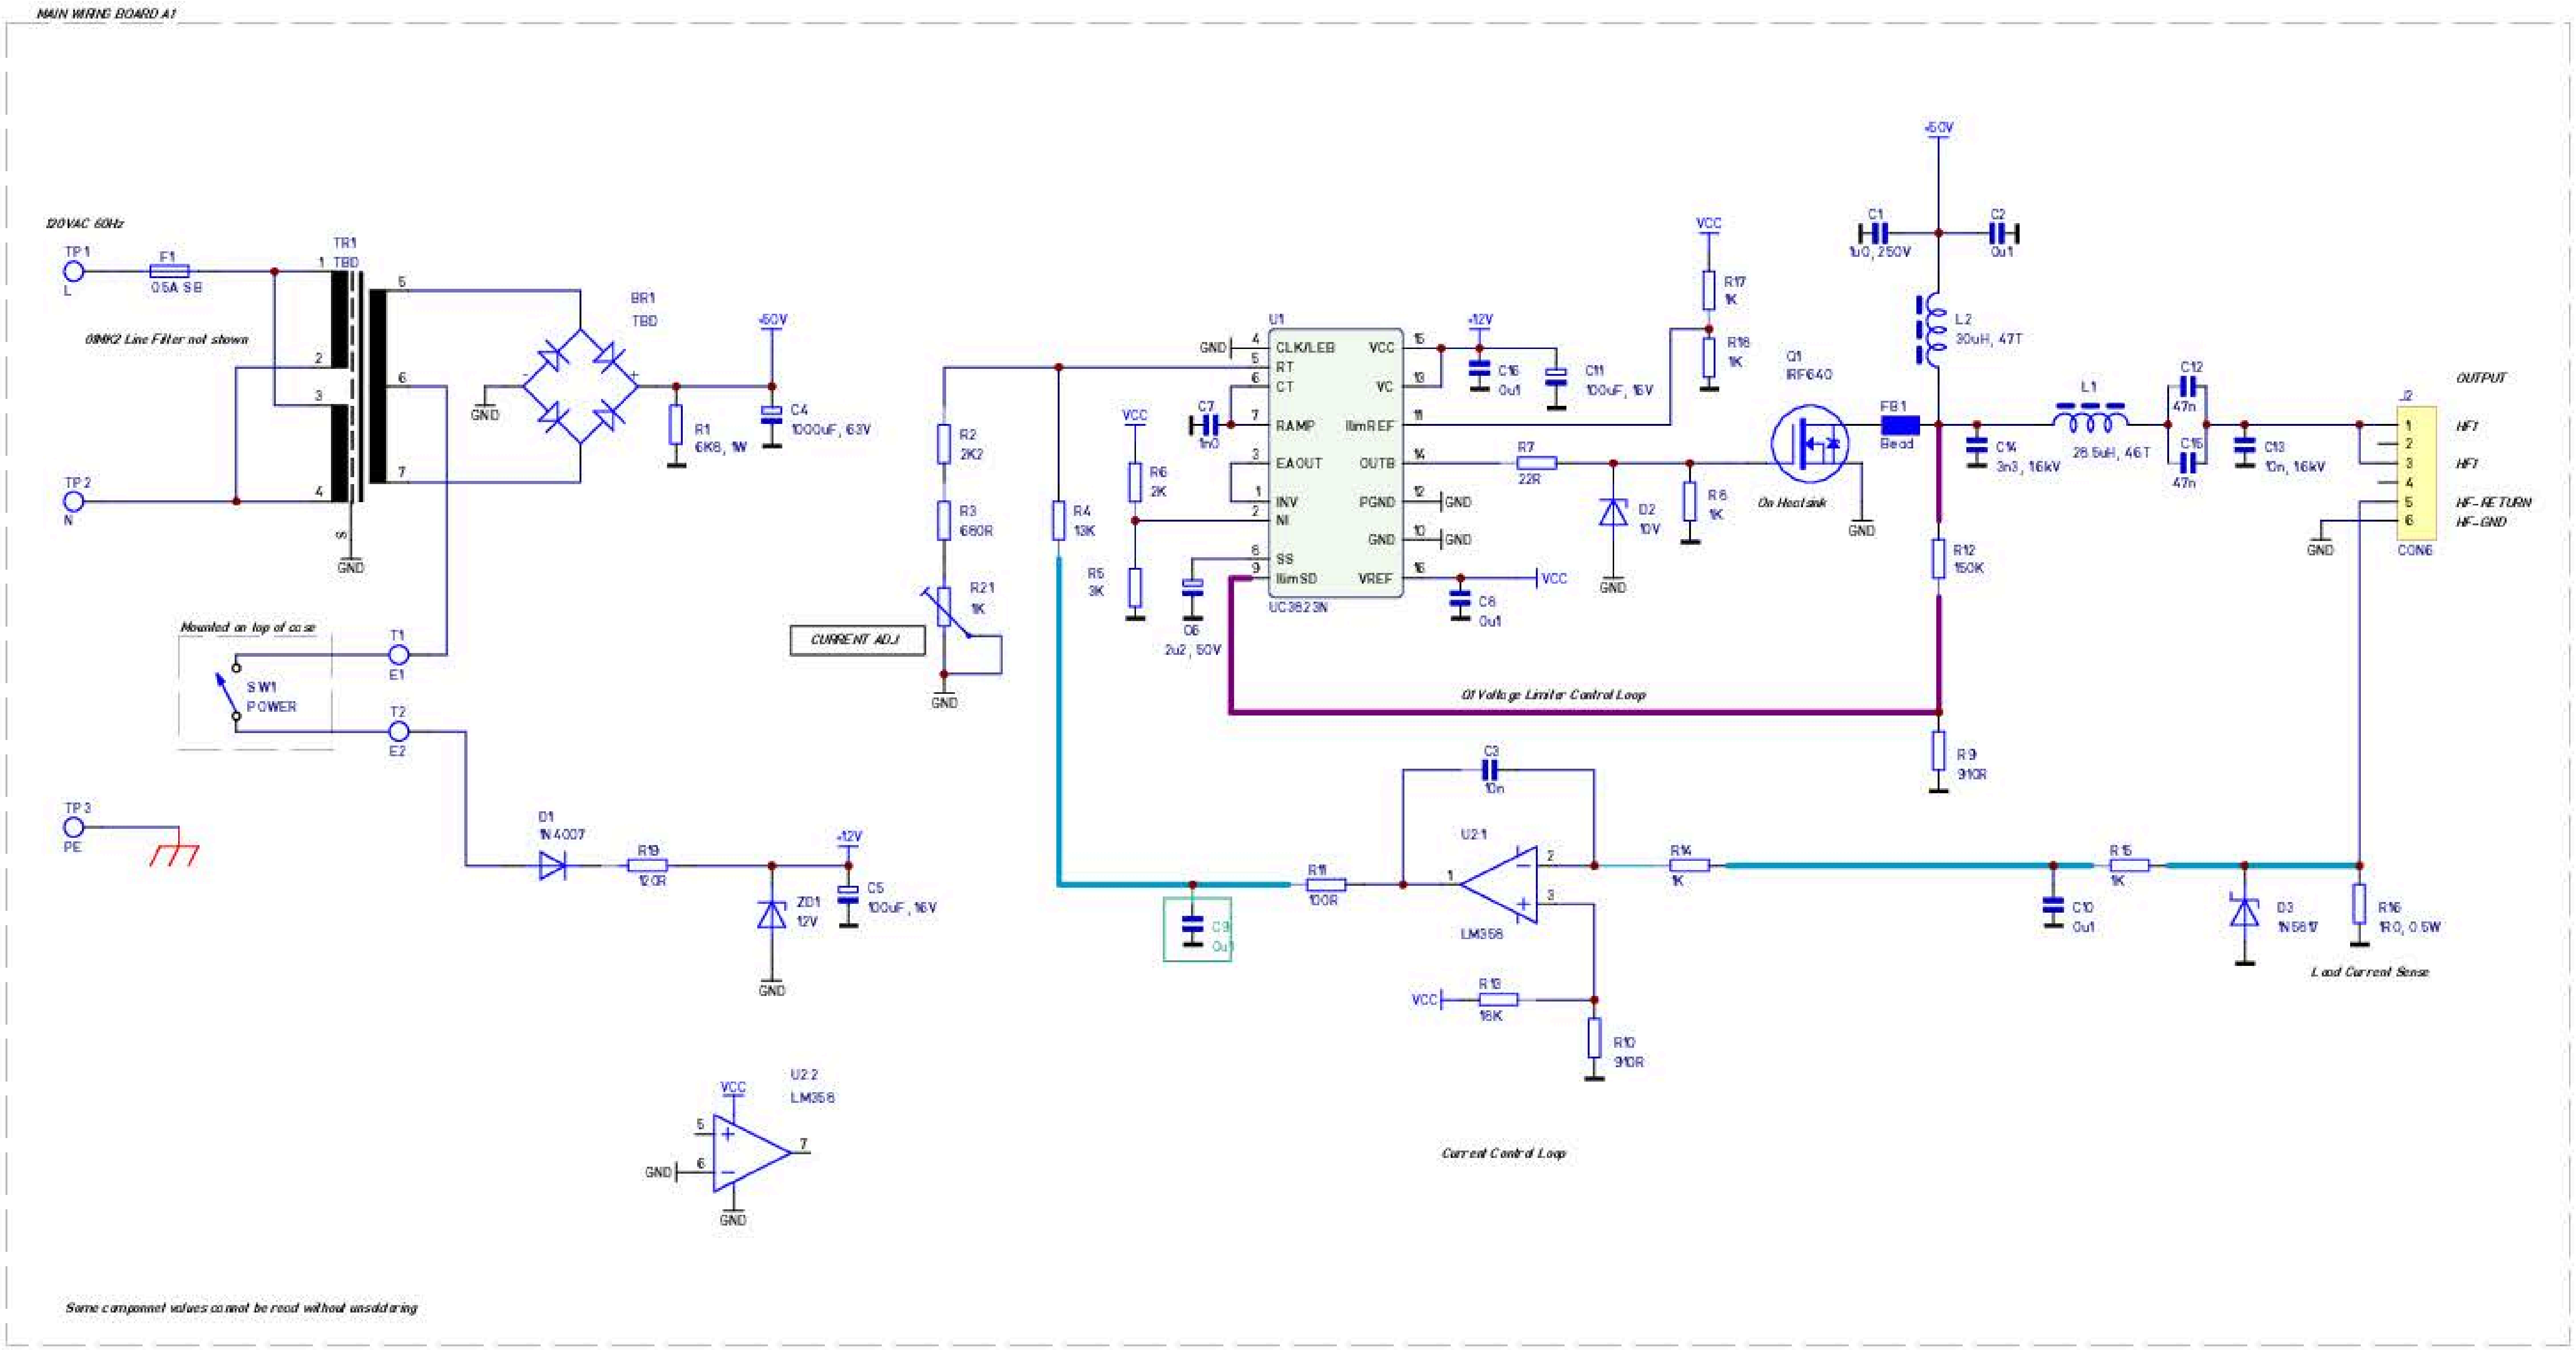

Unless otherwise specified, all values are as follows: resistor values are in Ohms, i.e. 0R47, 5R6, 220, 5K6, 22K capacitor values are in Microfarads, i.e. 220p, 0u1, 2u2, 33 inductor values are in Microhenries, i.e. 0u22, 5u6, 68, 2m2	*Prelininary Schematic*	PCB Name: *Main Board* / PCB Nr: *7022-0000 REVD* / PCB Type: *FR4 2L 1L 2SM 15mm* / Scale: *SCH*	Title: *SP200 Solder Station* / Used in: *SP-PWI-10* / Replfor: *n/a* / Build No: *n/a*
This drawing is our property. Duplication, unauthorized use of any kind is prohibited. Without Approval use only for inquiry. / Approval:	Drawn: Date *17-Oct-2013 06:15:32*, Name *GJO* / Modified / Checked / ☐ Prototype ☒ Production ☐ BOM Done?	Change Index / Change Notification Nr / Date / Name	Drw Type: *PCB SCHEMATIC* / Prj Nr: *13028G* / Size: B / Rev: 3 / Drw Nr: *13028-STPS-E01* / File: *SP200.sch* / Sheet 1 of 1

Requires TGL-0.17 Font